



## PRODUCT CATALOG

### OMEGA STONE OF ARTS

D&W Corporation  
*Office*  
Graha Bima Terrace Kav A-26  
Jl Kalikoa Cirebon 45135  
West Java – Indonesia  
Telp. +62 231 3346066  
Fax. +62 231 8491546  
Email. [info@omegastones.net](mailto:info@omegastones.net)  
Website: [www.omegastones.net](http://www.omegastones.net)

*Factory*  
Lengkong Wetan, Majalengka  
West Java – Indonesia




---

## **OUR PRODUCT**

We produce various kinds of Indonesia Natural stone especially stone that can be explored in Java Island.

### ***SANDSTONE***

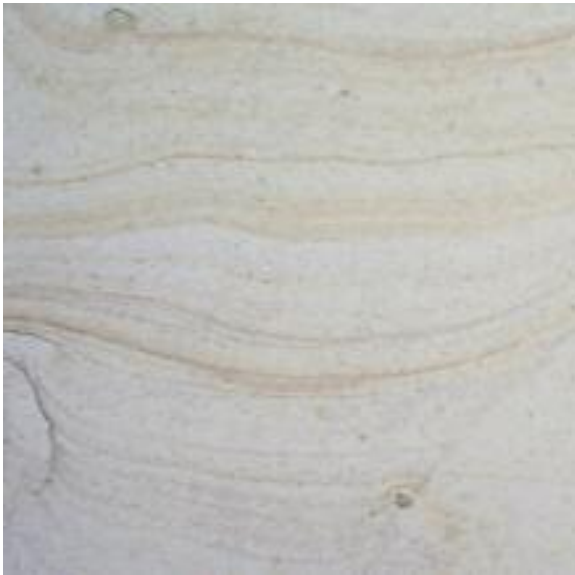

**GOLDEN PALIMO**



**WHITE PALIMO**

A beautiful fine grained stone that has general characteristic in creamy white base colour, high stone density, good abrasion resistance, small grained (Palimo Blonde) and uniform creamy white (Palimo White).

***Application:***

Sandstone Palimo is suitable both for indoor and outdoor floor and wall application

***Cut Available:***

- Measurement: Cut to order with maximum cutting 400 x 600 mm
- Tile thicknesses: 10 to 30 mm
- Pavers thicknesses: 10 to 38 mm

***Finishing:***

- Sawn
- Honed
- Split Face Cladding
- Line Chiselled

---



## **SANDSTONE GALLERY**



**GOLDEN PALIMO-CLADDING STRIPS**



**GOLDEN PALIMO-SPLIT FACE CLADDING**

### **GOLDEN PALIMO TILES APPLICATION**

*Courtesy: Tile Warehouse Pty Ltd - New Zealand*





---

## ***BASALT***



**BLACK BASALT**



**GREY BASALT**



**CLASSIC BASALT**

Basalt is a very finely-grained igneous rock containing mainly plagioclase, amphibole and biotite materials. Basalt is similar to Andesite but with a higher silicon oxide content.

***Application:***

Andesite is suitable for pavers and tiles that in high traffic application.

***Cut available:***

- Thickness tolerance +/- 2 mm
- Measurement: Any with max cutting 400 mm x 600 mm

***Finishing:***

- Honed
- Rock/Natural Face
- Flamed
- Polish
- Line Chiselled

---

## **BASALT GALLERY**

**BLACK BASALT STRIPS CLADDING APPLICATION**  
*Courtesy: The Natural Stone Warehouse-South Africa*



**GREY BASALT STRIPS CLADDING APPLICATION**  
*Courtesy: Instone SDN BHD-Malaysia*



---



## **LIMESTONE**



**CLASSIC WHITE**



**CLASSIC GOLD**



**BREXI**

Limestones are a very finely grained stone with a high calcite content also containing halite and gypsum minerals. Some stones contain siliceous crystalline granules.

### ***Application:***

Limestone is suitable for wall, pavers and tiles that in low traffic application.

### ***Cut available:***

- Thickness tolerance +/- 2 mm
- Measurement: Any with max cutting 300 mm x 600 mm

### ***Finishing:***

- Honed
- Rock/Natural Face

---

## **LIMESTONE GALLERY**

**WHITE CLASSIC APPLICATION**

*Courtesy: Saja Stone PTY LTD - Australia*



**BREXI LIMESTONE APPLICATION**

*Courtesy: Ramayana Resort Hotels, Kuta, Bali*



---



## ***LAVASTONE AND SLATE***



**BLACK LAVA STONE**



**RUSTIC SLATE**



**BROWN SLATE**

A high density stones with natural surface suitable both for floor and wall application.

*Cut available:*

- Random Thickness
- Measurement: Irregular cut or Any with max cutting 300 mm x 300 mm

*Finishing:*

- Natural Face



---



## ***QUARTZ GREEN STONE SUKABUMI***



Medium density stones with suitable both for floor and wall application especially for pool tiles

*Cut available:*

- Measurement: 100x100x1 mm (Pool Tiles), 100x100, 100x200, 150x150 Split face.

*Finishing:*

- Natural Split Face

- Honed



**GREEN STONE SUKABUMI FOR  
POOL TILES APPLICATION**  
*Courtesy: Pavimenti Brazil*

---



## ***SLATE AND LAVASTONE GALLERY***

**BLACK LAVASTONE AND GREEN STONE (INSIDE THE POOL) APPLICATION**

*Courtesy: Bali Garden Hotels*



**RUSTIC SLATE APPLICATION**

*Courtesy: Idea Magazine*



---

## TECHNICAL SPECIFICATION

### 1. Lab Test Result For Palimo (Blonde/White)

STONE CATEGORY	: Sandstone
COMMERCIAL NAME	: Palimo Gold/White
COLOUR	: Pale White-Grey / White-Yellow Grain
STRUCTURE	: Massive
TEXTURE	: Porphyritic which have fine crystals of plagioclase, quartz and mafic mineral phenocrysts.

#### **TEST RESULT**

Natural Density	(gr/cc): 2.23
Dry density	(gr/cc): 2.20
Saturated density	(gr/cc): 2.33
App. Specific gravity	(gr/cc): 2.20
True specific gravity	(gr/cc): 2.55
Absorption	(%): 6.24
Porosity	(%): 13.72

### 2. Lab Test Result For Basalt

STONE CATEGORY	: Basalt
COMMERCIAL NAME	: Basalt (Grey, Black)
COLOUR	: Light/dark grey colouring with small or large amphibole flecks distributed randomly through stone
STRUCTURE	: Hard, Strong resistant
TEXTURE	: Very finely igneous rock containing mainly plagioclase, amphibole and biotite material

#### **TEST RESULT**

Uniaxial compression strength	(MPa): 181.0
Flexural strength	(MPa): 26.7
Impact resistance	(Kg.m/M2): 126.0
Uniaxial compression strength after freeze	(MPa): 167.0
Water absorption coefficient	(%): 0.68
Abrasive wear resistance	(Kg/M2): 1.7
Density	(g/cm3): 2.68



---

**CONTACT US FOR ORDER NOW !!**

Omega Stone of Arts (D&W Corporation)

Graha Bima Terrace Kav A-26

Jl Kalikoa Cirebon 45135

West Java - Indonesia

Telp. +62 231 3346066

Fax. +62 231 8491546

Email. [info@omegastones.net](mailto:info@omegastones.net)

Website: [www.omegastones.net](http://www.omegastones.net)

PIC. Winsen Setiawan